



DEPLOSUN

ARTIC GLASS TOP

DEPOSUN LIGHT PIPES it's a new system that captures daylight through domes located in the building roofs and transports it many meters inside using a high reflectivity aluminium tube. Bring natural light to black areas o rooms without windows like bathrooms, basements, offices, industrial buildings such as warehouse, manufacturing areas, or subway stations.

FINAL RESULT is brightening areas, full of live thanks to sun light. Transform completely black areas and reduce up to 45%-50% lighting energy consumption using free and sustainable natural energy.

SISTEMA MODULAR

DEPOSUN SYSTEMS are a modular concept where each customer can purchase a complete kit or independent modules to be integrated in their own constructive light pipe solutions. That means that any light pipe manufacturer could use our Glass.top and Flat Top introduce glass advantages in their products as a product upgrade. Also our portfolio of Diffusers , could be adapted to any system.

1. DEPOSUN FLAT TOP DOMES WITH DEPLOCELL TECHNOLOGY

Glass Top domes are manufactured in "double glass" technology with isolation air chamber and external tempered side glass, it gives the system a mechanical and scratch endurance almost impossible to achieve with any plastic in the market. The reflective grid with Deplocell Technology is manufactured in high reflective aluminium that captures and redirects sun rays inside the pipe increasing performance. The special shape and design maximizes winter performance (lowest rays) and minimizes summer performance protecting from excessive heat stroke.



2. REFLECTIVE PIPE DEPLO DUCT

Due to a superficial silver treatment SILVER-PLUS 98% (98% super-reflective factor as per DIN5036) , they could transfer sun light up to 21 m. Is the only one in the market to be a sold reflective material and not a laminated polymer sheet, so we could guaranty a better stability to sun exposure during all life of the tube. The manufacturer gives 25 years of guarantee.




3. DIFFUSERS DEPLO DIF

Deliver crystal clear and homogeneous daylight with the radiance of natural light. Selective UV rays protection in order to preserve inside materials from degradation. A simple design harmonizes with any decoration. Call us from special features.



DEPLOCCELL

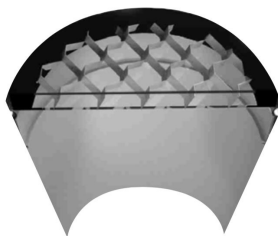


Reflective grid **Deplocell** is a Patented System that captures sunlight and redirects sun rays inside the pipe, increasing up to doubling performance comparing to traditional sun pipes in the market.

Reflective grid DEPLOCCELL is factory mounted inside isolation air chamber from the double glazed device, being absolutely protected from dust and scratch. In conventional light pipes domes, low rays (winter), they have to go through many reflections inside the pipe, and decreases performance.


Patented reflective-grid is manufactured in **aluminum Silver-Plus** 98% with a superficial silver treatment up to 98% as per DIN5030, with 25 years guaranty. Due to be a solid reflective material, we could guaranty a better stability to sun exposure.

TRADITIONAL DOME

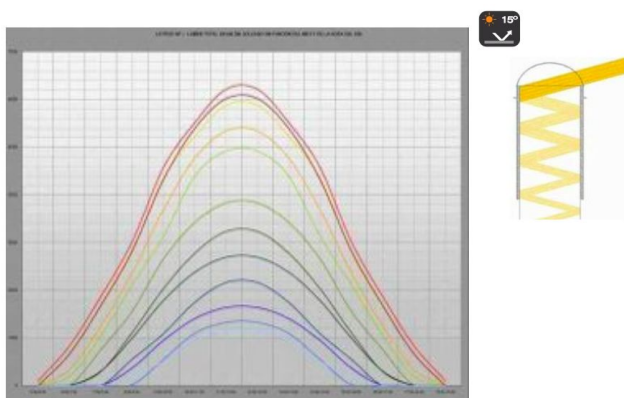

In conventional domes, low rays (winter), hit inside the aluminum pipe at a shallow angle causing rays to go through multiple bounces at the end of the tube, of course this decreases their performance.

DEPOSUN DOME

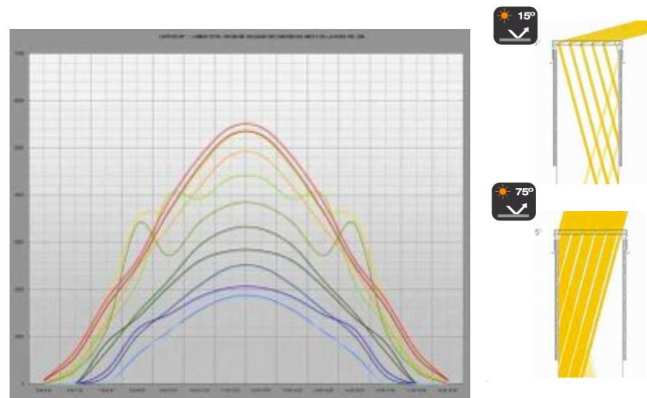

Deplosun domes with Deplocell technology redirect sun rays inside the pipe reducing reflections inside, increasing up to doubling the amount of light comparing with traditional sun pipes in the market.

GRID INSTALLATION

When installing Deplosun Flat Top, the **Deplocell** grid should be south oriented to maximize sun capture during all day.



Our domes and skylights are the only market made double glazed with internal anti-condensation air chamber, insulation. The hardened exterior of his face gives him a mechanical resistance to impact and scratch, hard to achieve with plastics.

GLASS DOMES		
	GLASS Double glass Deposun domes	PLASTIC Monovalve plastic dome
AGING	<p>Glass has not aging process, and their properties get inalterable for years.</p> <p>●●●●●●</p>	<p>It yellows, cracks and loses mechanical properties with years. Chemical agents can accelerate degradation.</p> <p>●○○○○○</p>
SCRATCH RESISTANCE	<p>Glass has a high superficial hardness up 6,5 Mohrs. Will never get scratched or lose it's light properties.</p> <p>●●●●●●</p>	<p>Plastic could be scratched easily when cleaned or manipulated, losing light properties.</p> <p>●○○○○○</p>
ACOUSTIC INSULATION	<p>Very high acoustic isolation due to a double glazed window with air chamber and 100% sealed system. Reach up to 49 dBs.</p> <p>●●●●●●</p>	<p>Very low acoustic isolation because there is only one plastic barrier. Air flows and lets sound come in and out.</p> <p>●○○○○○</p>
TERMAL INSULATION	<p>Deposun dome with double glazed window, air chamber and 100% sealed system will reach $U=2,6\text{ W/m}^2\text{K}$, and is we take into consideration lightpipe could reach $1,7\text{ W/m}^2\text{K}$</p> <p>●●●●●●</p>	<p>Monovalve dome from 3mm thickness with air flow system will offer very low thermal insulation. Normally up to $U=5,4\text{ W/m}^2\text{K}$</p> <p>●○○○○○</p>

DEPLOCCELL GRID

Deplosun technology in high reflective aluminium captures and redirects sun rays inside the pipe, increasing the performance. It's the only system in the market without a sun tracking mechanical system that maximizes sun light with 3 specially designed and oriented plans for morning, midday and afternoon rays. It's design maximizes performance in winter (when low rays) and decreases it in summer preventing a heat stroke.

ALUMINIUM PIPES

Due to a superficial silver treatment SILVER_PLUS 98% (98% super-reflective factor as per DIN5036), they could transfer sun light up to 21 m. Is the only in the market to be a sold reflective material and not a laminated polymer sheet, so we could guaranty a better stability to sun exposure during all live of the tube (25 years guaranty)

ISOLATED FLASHING DESIGNED FOR VERY COLD WEATHERS

The Flashing for this Glass Top ARTIC version is a design with a 8cm isolating mineral wool $\geq 0,038$ in between two metallic rings. **Specially designed for very cold climate.**

	NON-SLIP PLUS		
	300	550	760
EXTERNAL FLASHING DIAMETER (Cm) Ø A	48	73	94
GLAZING DESIGN	T4 + F4/24 (Argon)/Le4	T6 + F6/24 (Argon)/Le4	T8 + F8 / 24(Argon)/Le6
MINERAL WOOL ISOLATION CONDUCTIVITY (λ) (8cm)	0,038 w/mK	0,038 w/mK	0,038 w/mK
DISTRIBUTED LOAD (q)	450Kg/m²	450Kg/m²	450Kg/m²
SCRATCH RESISTANCE	6,5 Mohrs	6,5 Mohrs	6,5 Mohrs
THERMAL TRANSMITTANCE (U) COMPLETE SYSEM (ISO 10077-1:2006/AC:2009)	0,74 W/m²K	0,74 W/m²K	0,74 W/m²K
LIGHT TRANSMISSION (TUV) (EN 410)	Winter = 0,79 Summer = 0,60	Winter = 0,79 Summer = 0,60	Winter = 0,79 Summer = 0,60
SOLAR FACTOR (g)	Winter = 0,77 Summer = 0,62	Winter = 0,77 Summer = 0,62	Winter = 0,77 Summer = 0,62
ULTRAVIOLET TRANSMISSION COEFFICIENT (TUV)	0,01	0,01	0,01
SOUND ATTENUATION (Rw)	30dB	30dB	30dB
LAMINATED SECURITY GLASS	YES	YES	YES
INCREASE OF PERFORMANCE (DEPLOCCELL TECH)	INTEGRATED (200%)	INTEGRATED (200%)	INTEGRATED (200%)

ARTIC GLASS-TOP DOMES

